



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03100424.5

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

DEN HAAG, DEN
THE HAGUE, 24/02/03
LA HAYE, LE



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

**Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation**

Anmeldung Nr.:
Application no.:
Demande n°: 03100424.5

Anmeldetag:
Date of filing:
Date de dépôt: 21/02/03

Anmelder:
Applicant(s):
Demandeur(s):
AGFA-GEVAERT
2640 Mortsel
BELGIUM

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:

Method and device for printing grey scale images at high printing speed and image quality

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing:
Etats contractants désignés lors du dépôt:

AT/BG/BE/CH/CY/CZ/DE/DK/EE/ES/FI/FR/GB/GR/HU/IE/IT/LI/LU/MC/

Bemerkungen:
Remarks:
Remarques:

- 1 -

[ABSTRACT]

METHOD AND DEVICE FOR PRINTING GREY SCALE IMAGES AT HIGH PRINTING
SPEED AND IMAGE QUALITY

5

The present invention relates to ink jet printing, and more particularly to a method of printing and an apparatus for providing images having grey levels of varying intensity.

10 The present invention provides a method and device for printing grey scale images on a printing medium. The method includes delivering at least a number of first droplets of printing material of a colour with a first volume from a first printhead (10) and a number of second droplets of printing material of that colour with a second volume from a second printhead (11), the first volume and the second
15 volume being different, and merging together the number of first droplets and the number of second droplets on a target pixel position on the printing medium to obtain a given greyscale dot on the printing medium.

20 Fig. 1



- 2 -

[DESCRIPTION]

FIELD OF THE INVENTION

5

The present invention relates to ink jet printing, and more particularly to a method of printing and an apparatus for providing images having grey levels of varying intensity. With grey levels is meant black/white/grey and/or colour levels of varying intensity.

10

BACKGROUND OF THE INVENTION

Printing is one of the most popular ways of conveying information to members of the general public. Digital printing using raster
15 printers allows rapid printing of text and graphics stored on computing devices such as personal computers. These printing methods allow rapid conversion of ideas and concepts to printed product at an economic price without time consuming and specialised production of intermediate printing plates such as lithographic plates. The
20 development of digital printing methods has made printing an economic reality for the average person even in the home environment.

Conventional methods of raster printing often involve the use of a printhead, e.g. an ink jet printhead, with a plurality of marking
25 elements, e.g. ink jet nozzles. The marking elements transfer a marking material, e.g. ink or resin, from the printhead to a printing medium, e.g. paper or plastic. The printing may be monochrome, e.g. black, or multi-coloured, e.g. full colour printing using a CMY (cyan, magenta, yellow, black = a process black made up
30 of a combination of C, M, Y), a CMYK (cyan, magenta, yellow, black), or a specialised colour scheme (e.g. CMYK plus one or more additional spot or specialised colours). To make a print on a printing medium such as paper or plastic, the marking elements are
35 "fired" in a specific order while the printing medium is moved relative to the marking elements. Each time a marking element is fired, marking material, e.g. ink, is transferred to the printing

- 3 -

medium by a method depending on the printing technology used. Typically, in one form of printer, the head will be moved relative to the printing medium to produce a so-called raster line which extends in a first direction, e.g. across a page. The first
5 direction is sometimes called the "fast scan" direction. A raster line comprises a series of dots delivered onto the printing medium by the marking elements of the printhead. The printing medium is moved, usually intermittently, in a second direction perpendicular to the first direction. The second direction is often called the
10 "slow scan" direction.

The combination of moving the printhead relative to the printing medium while printing raster lines, and moving the printing medium relative to the printhead while not printing results in a series of parallel raster lines which are usually closely spaced. Seen from a
15 distance, the human eye perceives a complete image and does not resolve the image into individual dots provided these dots are close enough together. Closely spaced dots of different colours are not distinguishable individually but give the impression of a blended colour determined by the amount or intensity of the different
20 composing colours, e.g. cyan, magenta and yellow which have been applied.

In order to improve the image reproducibility of the printing method, e.g. of a straight line, it is preferred if the distance between dots of the raster is small, that is the printing has a high
25 resolution. Although it cannot be said that high resolution always means good printing, it is true that a minimum resolution is necessary for high quality printing. A small dot spacing in the slow scan direction means a small distance between marker elements on the printhead, whereas regularly and small dot spacing in the fast scan
30 direction places constraints on the quality of the drives used to move the printhead relative to the printing medium in the fast scan direction.

Generally, there are mechanisms for positioning a marker element in a proper location over the printing medium before it is fired.
35 Usually, such drive mechanisms are controlled by a microprocessor, a programmable digital device such as a PAL, a PLA, an FPGA or similar

- 4 -

although the skilled person will appreciate that anything controlled by software can also be controlled by dedicated hardware and that software is only one implementation strategy.

To be successful in the market, ink jet printing presses

5 should combine good grey-scale capabilities, high printing speeds, and good reliability. This is not easily achievable with current prior art systems and concepts.

It is known from **US-2002/0105557** to generate gradation levels or grey levels in a printed image by a combination of different sizes
10 of printed dots. Two embodiments of printheads are described.

According to a first embodiment, a printhead for a given colour comprises two head chips for that colour, and each head chip comprises a nozzle row with nozzles with different area, e.g. large and small nozzles, from which different amounts or volumes of ink
15 are ejected. The large and small nozzles are alternately arranged in each of the nozzle rows. Furthermore, corresponding nozzles on each of the head chips, i.e. e.g. an x^{th} nozzle on each of the head chips, have a different area, i.e. if the x^{th} nozzle on the first head chip is a large one, the corresponding x^{th} nozzle on the second head chip
20 is a small one and vice versa.

According to a second embodiment, two head chips are provided each of which has only nozzles from which the larger or smaller ink droplet is ejected, i.e. a first head chip has all large nozzles and a second head chip has all small nozzles. The two head chips from
25 which ink droplets of the same colour but different sizes are ejected have respective arrangements of nozzles which are offset from each other in a direction perpendicular to a scanning direction of the two head chips.

In both above embodiments, a pixel location on a printed medium is
30 printed with either no droplet, a droplet of a small size or a droplet of a large size, different pixels together forming a superpixel having a grey level depending on the droplets actually printed. A superpixel, e.g. a 2x2 pixel matrix, using 2 levels of droplet sizes per pixel is thus built. In such 2x2 superpixels with
35 two levels of droplet size, in theory nine distinguishable grey levels can be generated. With the above system, grey level images

- 5 -

are printed with a resolution which is half of the resolution of the printheads, sets of two neighbouring nozzles of the head chips generating dots in one superpixel, each superpixel forming one imagepixel. The head chips for each colour ink are bonded to each other to form an integral printhead. 2x2 dot patterns disposing larger and smaller dots can be formed during a single scan operation. Obtaining grey levels this way is called dithering. It is very difficult to make a printhead in which a marking element is suitable for printing droplets which differ in volume from each other to a large extent, e.g. a printhead marking element suitable for firing both droplets of 5 picoliter and droplets of 40 picoliter. If it is desired to make a printhead suitable for optimally printing such different droplets, such head becomes very expensive. It is a further disadvantage of the system of **US-2002/0105557** that the image printed has a resolution which is only half of the resolution of the printhead. So improved grey scaling has been traded-off with resolution. Also, firing times of different drop sizes must be carefully controlled as the velocity of different drop sizes and delay before ejection of different drop sizes may be different. This is known as droplet ballistics. Due to the speed of a scanning ink jet printhead when traversing, any change in droplet velocity or delay time of ejection will result in the drops landing at a different place on the printing medium. Thus, if different drop sizes are used, the control mechanisms must be complex. For example as disclosed in **US 4,714,935** and **EP 902 587**, the real-time firing of each drop has to be controlled individually so that the droplets with different sizes hit the printing medium at the correct place.

For obtaining a lot of grey scale or contone levels, often a plurality of small droplets, e.g. 16, 29 or 32 small droplets, are combined to form a plurality of levels of ink load, e.g. 17, 30 or 33, see for example "Printer Handbook", M.L. Chambers, IDG books, 2nd edition, 2000, especially chapter 3. The more ink is applied to the printing medium, the larger the size of the printed dot and the darker the image. This is called area modulated printing. However, this means that the printing device must be able to fire a small

- 6 -

droplet of ink at a same pixel position on the printing medium a plurality of times, e.g. 16, 19 or 32 times. Such a printing device will be slower, e.g. 16, 19 or 32 times slower, than a binary printing device. Improved grey scaling has thus been traded-off with
5 printing speed.

It is also known to do contone printing using time modulation. In that case more contone levels means reduction of the standard firing frequency, and thus also a slower printing speed.

There is a need for a method and a device for printing contone
10 images at a speed which is higher than the speed of known contone printing devices, and with a better image quality.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an ink jet
15 printhead and a method for printing grey scale images at high printing speed and high printing quality.

The above objective is accomplished by a method and device according to the present invention.

The present invention provides a method for printing grey scale
20 images on a printing medium. The method comprises delivering at least a number, i.e. zero or more, of first droplets of printing material of a colour with a first volume from a first printhead and a number, i.e. zero or more, of second droplets of printing material of that colour with a second volume from a second printhead, the
25 first volume and the second volume being different, and merging together said number of first droplets and said number of second droplets on a target pixel position on the printing medium to obtain a given greyscale dot on the printing medium. With colour is meant real colour or black/white. With grey scales or grey levels is meant
30 colour levels of varying intensity or black/white/grey of varying intensity.

According to one embodiment, the first printhead only produces the first droplets with the first volume and the second printhead only produces the second droplets with the second volume. According to
35 another embodiment, both the first and the second printheads produce droplets with the first volume and with the second volume, but at a

- 7 -

pixel location where the first printhead produces a number of droplets with the first volume, the second printhead produces a number of droplets with the second volume and vice versa.

A method according to the present invention may furthermore comprise
5 printing grey scale levels by forming a dithering pattern. Such dithering pattern may for example be a global dithering pattern, i.e. a dithering pattern applied over the complete image to be printed, e.g. in order to obtain even more grey tones. According to another embodiment, it may be a local dithering pattern, i.e. a
10 dithering pattern applied over only part of the image, including a reduced number of pixels, e.g. in order to mask printing defects caused by defect marking elements in the printing device used for printing grey scale images.

The first and the second printhead may respectively have a first and
15 a second intrinsic droplet frequency, being the number of times per time unit a marking element can be fired. In a method according to the present invention, a first droplet and a second droplet of printing material may be delivered at a nominal droplet frequency, the nominal droplet frequency being the slowest of the first and the
20 second intrinsic droplet frequencies.

A nominal printing frequency may correspond to the nominal droplet frequency. The nominal printing frequency is the number of times per time unit a grey scale dot can be printed at different pixel positions. There is a relationship between nominal droplet frequency
25 and nominal printing frequency depending on the number of droplets that need be printed with one marking element as part of one grey scale dot. According to one embodiment of the present invention, printing may be done at the nominal printing frequency. The nominal printing frequency may for example be at least 10 kHz. According to
30 another embodiment of the present invention, printing may be done at a printing frequency that is lower than the nominal printing frequency. For example, the printing frequency may be at least 5 kHz with the maximum number of droplets that can be delivered at a pixel position by each marking element being two.

- 8 -

In a method according to the present invention, a number of first droplets may be printed instead of a second droplet when printing a second droplet would generate artefacts or vice versa.

The present invention also provides an ink jet printer suitable for
5 printing grey scale images onto a printing medium. The printer comprises at least a first and a second printhead for a colour. Each printhead has a plurality of marking elements arranged in a row. The first printhead is provided for delivering first droplets of printing material of a colour with a first volume and the second
10 printhead is provided for delivering second droplets of printing material of that colour with a second volume, the first and the second volume being different from each other. The printer also comprises a drive system to drive said at least first and second printhead with a constant frequency so that a pixel to be created
15 from said first and second droplets is formed by merging together said first and second droplets on a target pixel position on the printing medium.

An ink jet printer may for example comprise three or more printheads for one colour. A different number of printheads may be provided for
20 different colours.

According to an embodiment, the first printhead only produces the first droplets with the first volume and the second printhead only produces the second droplets with the second volume. According to another embodiment, both the first and the second printhead produce
25 droplets with the first and the second volume, but so that at locations where the first printhead can produce a droplet with the first volume, the second printhead can produce a droplet with the second volume, and vice versa.

The marking elements of the first and the second printheads may have
30 a same marking element to marking element pitch.

The first and second printheads may have an identical lay-out except for a droplet-size determining property.

Marking elements may have any suitable shape, such as circular or triangular for example. Marking elements have an area. A printhead
35 may have a plurality of chambers each having an internal geometry. Printheads may be driven by a waveform having a shape and an

- 9 -

amplitude. According to one embodiment, the droplet-size determining property may be the area of the marking element. According to another embodiment, the droplet-size determining property may be the internal geometry of a chamber. According to still another
5 embodiment, the droplet-size determining property may be the shape and/or the amplitude of the driving waveform. Also a combination or optimisation of the above droplet-size determining properties may be a droplet-size determining property.

The present invention furthermore provides a method of extending
10 printer lifetime of a printer according to the present invention. According to this method, if a marking element of a first printhead for a colour is defective, printing with this marking element is replaced by printing with a corresponding marking element from another printhead for that colour, or vice versa.

15 The present invention also provides a method of preventing image artefacts when printing with a printer according to the present invention. According to this method, if a marking element of a first printhead for a colour is defective, printing with this marking element is alternated with or replaced by forming a dither pattern
20 by printing with a corresponding marking element on a second printhead for that colour, or vice versa.

These and other characteristics, features and advantages of the present invention will become apparent from the following detailed description, taken in conjunction with the accompanying drawings,
25 which illustrate, by way of example, the principles of the invention. This description is given for the sake of example only, without limiting the scope of the invention. The reference figures quoted below refer to the attached drawings.

30 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates a printhead assembly according to a first embodiment of the present invention, the printhead assembly comprising a first printhead with an array of nozzles having a large
35 nozzle area and a second printhead with an array of nozzles having a small nozzle area.

- 10 -

Fig. 2 illustrates a printhead assembly according to a second embodiment of the present invention, the printhead assembly comprising a first printhead with an array of nozzles, alternating nozzles with a large nozzle area and nozzles with a small nozzle area, and a second printhead with an array of nozzles, alternating nozzles with a small nozzle area and nozzles with a large nozzle area, so that on corresponding nozzle positions on the first and second printhead, the first printhead is provided with a nozzle with a large area and the second printhead is provided with a nozzle with a small area, and vice versa.

Fig. 3A illustrates printing according to the prior art, where a defect marking element on one printhead does not print, Fig. 3B illustrates printing wherein a defect marking element on a first printhead for a colour is replaced by a corresponding marking element on a second printhead for that colour, and Fig. 3C illustrates printing wherein a defect marking element on a first printhead for a colour is replaced with a dither pattern formed with corresponding marking elements on a second and third printhead for that colour.

DETAILED DESCRIPTION OF THE INVENTION

The present invention will be described with respect to particular embodiments and with reference to certain drawings but the invention is not limited thereto but only by the claims. Where the term "comprising" is used in the present description and claims, it does not exclude other elements or steps.

The drawings described are only schematic and are non-limiting. In the drawings, the size of some of the elements may be exaggerated and not drawn on scale for illustrative purposes.

Furthermore, the terms first, second, third and the like in the description and in the claims, are used for distinguishing between similar elements and not necessarily for describing a sequential or chronological order. It is to be understood that the terms so used are interchangeable under appropriate circumstances and that the

- 11 -

embodiments of the invention described herein are capable of operation in other sequences than described or illustrated herein. The present invention will be described with reference mainly to ink-jet printing but the present invention is not limited thereto.

5 The term "printing" as used in this invention should be construed broadly. It relates to forming markings whether by ink or other materials or methods onto a printing medium. Various printing methods which may be used with the present invention are described in the book "Principles of non-impact printing", J. L. Johnson,

10 Palatino Press, Irvine, 1998, e.g. thermal transfer printing, thermal dye transfer printing, deflected ink jet printing, ion projection printing, field control printing, impulse ink jet printing, drop-on-demand ink jet printing, continuous ink jet printing. Non-contact printing methods are particularly preferred,

15 however the present invention is not limited thereto. Any form of printing including dots or droplets on a medium is included within the scope of the present invention, e.g. piezoelectric printheads may be used to print polymer materials as used and described by Plastic Logic (<http://plasticlogic.com/>) for the printing of thin

20 film transistors. Hence, the term "printing" in accordance with the present invention not only includes marking with conventional staining inks but also the formation of printed structures or areas of different characteristics on a substrate. One example is the printing of water repellent or water attractive regions on a

25 substrate in order to form an offset printing plate by printing. Accordingly, the term "printing medium" or "printing substrate" should also be given a wide meaning including not only paper, transparent sheets, textiles, plastics but also off-press or on-press printing plates as part of a printing process. In addition the

30 printing may be carried out at room temperature or at elevated temperature, e.g. to print a hot-melt adhesive the printhead may be heated above the melting temperature of the adhesive. Accordingly, the term "ink" should also be interpreted broadly including not only conventional inks but also solid materials such as polymers which

35 may be printed in solution or by lowering their viscosity at high temperatures, as well as materials which provide some characteristic

- 12 -

to a printed substrate such as water repelling structures on the surface of the printing substrate, or binding molecules such as DNA which are spotted onto micro-arrays. Inks as used with the present invention may include water or organic solvents, and a variety of additives such as anti-oxidants, pigments and cross-linking agents. According to the present invention, a plurality of printheads is used to print grey scale or contone images at a higher speed. According to a first embodiment, as shown in Fig. 1, a plurality of printheads **10, 11** for one colour is provided in a printing device according to the present invention, said plurality of printheads forming a grey scale printhead assembly **20**. Each of the printheads **10, 11** has an array or row of marking elements, e.g. nozzles **12, 13**, a first printhead **10** being provided for printing droplets of a first volume or first size, and a second printhead **11** being provided for printing droplets of a second volume or second size, the first volume or size and the second volume or size being different from each other. Preferably, each head can only print one volume or size of droplet. According to a second embodiment, illustrated in Fig. 2, each of the printheads **14, 15** forming a grey scale printhead assembly **20**, can print a plurality of droplet sizes, whereby printheads **14, 15** of a grey scale printhead assembly **20** are characterised in that a first printhead **14** is suitable for printing a first droplet size at a certain pixel position, while a second printhead **15** is suitable for printing a second droplet size at that same position.

The printheads **10, 11, 14 and 15** preferably have an identical layout, except for a droplet-size determining property. The droplet-size determining property may, according to one embodiment, for example be the nozzle area or diameter. For example the first and second printhead **10 and 11** may be provided with nozzles **12 and 13**, having a same nozzle pitch, but wherein nozzles **12** have a larger area than the nozzles **13**. Alternatively, the first printhead **14** may be provided with nozzles **21, 22** having alternating large and small sizes, the second printhead **15** being provided with nozzles **23, 24** also have alternating large and small sizes, but so that a large nozzle on an x^{th} position of the first printhead **14** corresponds to a

- 13 -

small nozzle on the corresponding x^{th} position of the second printhead **15**. The small nozzles **22** and large nozzles **21** on the first printhead **14** do not necessarily need to have the same area as the small nozzles **23** and large nozzles **24**, respectively, on the second printhead **15**. The droplet-size determining property may, according to a further embodiment, be also the internal geometry of the nozzle chamber. This internal geometry characterises the acoustic waves in the chamber, and thus the properties of the droplet expelled by the nozzles. Parts relating to the geometry of the chamber are, for example, its volume, the length of the electrodes, the height of the electrodes, the position of the electrodes, the position of the heating element. According to still another embodiment, the shape and/or amplitude of the driving waveform can be the droplet-size determining property. Also a combination and/or optimisation of the above droplet-size determining properties can be the droplet-size determining property.

According to an embodiment of the present invention, grey scale images are printed at the highest possible printing frequency by applying one droplet with a first size on a pixel position, or by combining a plurality of droplets with different sizes on that pixel position, whereby each droplet received on that pixel position originates from a different printhead, e.g. **10** and **11**. The different droplets need to be deposited at exactly the same place, thus forming a larger dot (area modulated printing). Each printhead **10**, **11** has an intrinsic maximum droplet frequency for jetting droplets of ink on the printing medium. The maximum droplet frequency of the grey scale printhead assembly **20** is then the maximum droplet frequency of the slowest printhead **10**, **11**. The printing frequency of the grey scale printhead assembly **20** corresponding to its maximum droplet frequency is called the nominal printing frequency of the grey scale printhead assembly **20**.

According to a second embodiment of the present invention, combination of droplets from the different printheads **10**, **11** may be deposited on the same pixel position, for example, up to two droplets originating from the first printhead **10** delivering droplets with a first volume or size can be combined with up to two droplets

- 14 -

originating from the second printhead **11** delivering droplets with a second volume or size. In this case, the maximum printing frequency of the grey scale printhead assembly **20** is half of its nominal printing frequency.

- 5 For example, 3 printheads from Spectra (www.spectra-inc.com) can be used, called SL-128, SE-128 and SX-128, as first, second and third printheads. Details of those printheads can be found in the table hereunder:

Printhead	SL-128	SE-128	SX-128
Nozzle line length	64.5 mm	64.5 mm	64.5 mm
Number of nozzles	128	128	128
Nozzle spacing	508 μ m	508 μ m	508 μ m
Nozzle diameter	50 μ m	38 μ m	
Calibrated drop size	80 pl	30 pl	10 pl
Maximum droplet frequency	30 kHz	40 kHz	10 kHz

10

Three such printheads can be mounted in line with each other, and driven so that an x^{th} nozzle at an x^{th} position on the first printhead can generate a droplet at a pixel position, and that a corresponding x^{th} nozzle at a corresponding x^{th} position on the second or third
 15 printhead can generate a droplet at that same pixel position, the droplets originating from the first, second and third printhead having a different volume.

With three printheads as mentioned above, one of each type, the following dot sizes can be generated in a single pass, i.e. at the
 20 maximum possible or nominal printing frequency:

SL-128	SE-128	SX-128	Total volume
0	0	0	0
0	0	10	10
0	30	0	30
0	30	10	40
80	0	0	80

- 15 -

80	0	10	90
80	30	0	110
80	30	10	120

Eight grey levels can thus be obtained at the nominal printing frequency.

With three printheads as mentioned above, one of each type, the following dot sizes can be generated if two droplets per printhead are allowed, i.e. if the printing frequency is halved:

SL-128	SE-128	SX-128	Total volume
0	0	0	0
0	0	10	10
0	0	10+10	20
0	30	0	30
0	30	10	40
0	30	10+10	50
0	30+30	0	60
0	30+30	10	70
0	30+30	10+10	80
80	0	0	80
80	0	10	90
80	0	10+10	100
80	30	0	110
80	30	10	120
80	30	10+10	130
80	30+30	0	140
80	30+30	10	150
80	30+30	10+10	160
80+80	0	0	160
80+80	0	10	170
80+80	0	10+10	180
80+80	30	0	190
80+80	30	10	200
80+80	30	10+10	210

- 16 -

80+80	30+30	0	220
80+80	30+30	10	230
80+80	30+30	10+10	240

This means that 25 grey levels can be obtained at half the normal printing frequency. For comparison: when in a prior art printing device with one printhead per colour a combination of up to 16 small droplets is used, at $1/16^{\text{th}}$ of the normal printing frequency, i.e. $1/8^{\text{th}}$ of the printing frequency of the embodiment described with the three Spectra printheads operated at half the nominal printing frequency so as to enable to print two levels at each position with each printhead, then only 17 grey levels can be obtained. Therefore, according to the present invention, more grey levels can be obtained, at a far higher printing speed.

Furthermore, grey scale printhead assembly 20 according to the present invention provides redundancy at the nozzle level: for every nozzle there is 1 redundant nozzle in the printhead assembly. If one of the nozzles is defective, according to the present invention, a redundant nozzle can be used to mask that defect. A generally recognized problem of raster printing is the formation of artefacts, generated by a nozzle which is printing at locations where it should not print. Artefacts are caused by the digital nature of the image representation and the use of equally spaced dots. Certain artefacts such as Moiré patterns may be generated due to the fact that the printing attempts to portray a continuous image by a matrix or pattern of (almost) equally spaced dots. One source of artefacts can be errors in the placing of dots caused by a variety of manufacturing defects such as the location of the marker elements in the head or systematic errors in the movement of the printhead relative to the printing medium. In particular, if one marking element is misplaced or its firing direction deviates from the intended direction, the resulting printing will show a defect which can run throughout the printing. A variation in drop velocity will also cause artefacts when the printhead is moving, as time of flight of the drop will vary with variation in the velocity. Similarly, a

- 17 -

systematic error in the printing medium transport may result in defects that may be visible. For example, slip between the drive mechanism for the printing medium and the printing medium itself will introduce errors. In fact, any geometrical limitation or
5 tolerances of the printing system can be a source of errors, e.g. the length of the printhead, the spacing between marking elements, the indexing distance of the printing medium relative to the head in the slow scan direction. Such errors may result in "banding", that is the distinct impression that the printing has been applied in a
10 series of bands. Although the errors involved can be very small, the colour discrimination, resolution and pattern recognition of the human eye are so well developed that it takes remarkably little for errors to become visible. Such artefacts can be resolved or made less visible with the use of a grey scale printhead assembly 20
15 according to the present invention.

For example, if a small nozzle is defective, whether it still prints but wrong, or does not print at all, not printing with the small nozzle can be compensated for with the use of its corresponding large nozzle by not printing anything for a number of times, and
20 then printing one larger droplet. This solution is better than printing nothing at all, because it results in an approximated grey value, while printing nothing at all results in unintentional white spaces in the printed image.

Alternatively, if for example a 30 pl nozzle is defective and does
25 not print anymore, it is possible to use a local dithering pattern. Instead of using the 30 pl nozzle, one uses the corresponding 80 pl and 10 pl nozzles to make a dithering pattern from e.g. one 80 pl droplet and two 10 pl droplets to approximate a 30 pl droplet. With a local dithering pattern is meant a dithering pattern that is
30 applied only locally, to alleviate the image quality degradation due to a printing defect caused by the non-printing of one of the nozzles. It may either mean to compensate a missing dot by printing another dot on that position, or it may mean to generate a dithering pattern covering also neighbouring positions. This is clarified by
35 means of Fig. 3A to 3C. For example, a constant grey tone corresponding to single dots of 30 pl on each pixel is to be

- 18 -

printed. In the example given in Fig. 3A, the nozzle X of the 30 pl head is defect and does not print anymore. In prior art printing, where this problem can not be solved, this would lead to a result as shown in Fig. 3A where a white stripe is formed by white pixels 30
5 at the locations where nozzle X of the 30 pl printhead should have been printing 30 pl pixels. If this would be solved by printing a 10 pl droplet 31, from nozzle X of the 10 pl printhead, everywhere where the defective 30 pl nozzle X, from the 30 pl printhead, should have been printing, the visual effect is much smaller but the defect
10 is still visible as shown in Fig. 3B. According to the present invention, a local dithering pattern can be applied, for example only on the location of that white stripe. In this local dithering pattern, for example one or more 10 pl droplets 31 would be alternated with one or more 80 pl droplets 32, as illustrated in
15 Fig. 3C. An integration of the obtained grey scale dots over the stripe which in fact was to be printed by nozzle X of the 30 pl printhead, should preferably be as close as possible to the grey scale tone corresponding to constant 30 pl printing. According to still another embodiment, not represented in the drawings, instead
20 of applying the local dithering pattern over the stripe corresponding to the defect nozzle only, the local dithering pattern may be extended over one or more pixels which are neighbouring to that stripe. The term "neighbouring to" a reference pixel, nozzle or marking element is defined as "the distance between a neighbour
25 and a reference being less than or equal to 3 pitches". For example a dithering pattern can be used including the pixels of the defective stripe X and their left and right neighbours X-1 respectively X+1, or the pixels of the defective stripe X and two neighbours to their left as well as two neighbours to their right.
30 Local dithering is to be distinguished from global dithering, which is dithering applied to the whole image in order to reproduce more grey tones than can be obtained solely by use of the available grey scale levels of printhead alone, in the present invention the grey scale printhead assembly.

35 Local dithering may extend the useful life of a single pass printer, because one defective nozzle may be compensated for by other

- 19 -

nozzles, and only if all nozzles which print at a certain location are defect, does a printhead need to be replaced.

Alternatively, according to the present invention, a grey tone corresponding to a 30 pl dot area may not be printed by always
5 putting down a droplet from the 30 pl head, but rather by sometimes printing 30 pl droplets, and combining this with sometimes (on other locations on the printing medium) printing 20 pl dots and 40 pl dots, i.e. generating a dither pattern from 20 pl, 30 pl and 40 pl dots, which overall has a grey tone value of 30 pl dots. This may be
10 very useful in a very reliable printing press, such as e.g. from Heidelberg Druckmaschine, Heidelberg, Germany or Spectra Inc., Lebanon, NH, USA, or in a cheap thermal printer, where reliability with respect to failure of a single marking element can be improved this way, while such devices still stay cheap because the IC-
15 technology for thermally driven printheads is cheap.

The present invention provides an improved method for generating grey tones by means of a grey scale printhead assembly **20**, without the need for dithering, and leading to a better printing speed
20 performance.

It is to be understood that although preferred embodiments, specific constructions and configurations, as well as materials, have been discussed herein for devices according to the present invention,
25 various changes or modifications in form and detail may be made without departing from the scope and spirit of this invention. For example, the present invention can be used both for generating grey scale tones both in colour and in black/white printing. Furthermore, when doing colour printing, a grey scale printhead assembly **20**
30 according to the present invention may be used for only some of the colours, while for the other colours another type of printhead may be used. For example in CMYK printing, a grey scale printhead assembly **20** according to the present invention can be provided for cyan, magenta and black, while for yellow another type of printhead
35 is provided, because yellow is visually less noticeable and thus requires less yellow grey scale levels to be available.

- 20 -

[CLAIMS]

1. A method for printing grey scale images on a printing medium, the
5 method comprising
 - delivering at least a number of first droplets of printing material of a colour with a first volume from a first printhead (10) and a number of second droplets of printing material of that colour with a second volume from a second printhead (11), the
10 first volume and the second volume being different,
 - merging together said number of first droplets and said number of second droplets on a target pixel position on the printing medium to obtain a given greyscale dot on the printing medium.
- 15 2. A method according to claim 1, wherein the first printhead (10) is for delivering droplets of a single volume, equal to said first volume, and the second printhead (11) is for delivering droplets of a single volume, equal to said second volume.
- 20 3. A method according to any of the previous claims, furthermore comprising a dithering step to increase the number of reproducible grey scale tones.
4. A method according to any of the previous claims, furthermore
25 comprising a dithering step to locally mask defects in generating a greyscale dot.
5. A method according to any of the previous claims, the first printhead (10) and the second printhead (11) respectively having
30 a first and a second intrinsic droplet frequency, a nominal printing frequency of the printing method being the lowest of the first and the second intrinsic droplet frequencies, the method further comprising printing at the nominal printing frequency.
- 35 6. A method according to any one of the claims 1 to 4, the first printhead (10) and the second printhead (11) respectively having

- 21 -

a first and a second intrinsic droplet frequency, a nominal printing frequency of the printing method being the lowest of the first and the second intrinsic droplet frequencies, the method further comprising printing at a printing frequency which is
5 lower than the nominal printing frequency.

7. A method according to claim 6, wherein the printing frequency is at least 5 kHz and the number of droplets that can be delivered at a pixel position by each printhead is at least two.

10

8. An ink jet printer suitable for printing grey scale images onto a printing medium, the printer comprising
- at least a first printhead (10) and a second printhead (11) for a colour, each printhead having a plurality of marking elements
15 (12, 13) arranged in a row, the first printhead being provided for delivering first droplets of printing material of that colour with a first volume and the second printhead being provided for delivering second droplets of printing material of that colour with a second volume, the first and the second volume being
20 different from each other,
- a drive system to drive said at least first printhead (10) and second printhead (11) with a frequency so that a pixel to be created with said first and second droplets is formed by merging together said first and second droplets on a position of said
25 pixel on the printing medium.

30

9. An ink jet printer according to claim 8, wherein the first printhead (10) is for delivering droplets of a single volume, equal to said first volume, and the second printhead (11) is for delivering droplets of a single volume, equal to said second volume.

35

10. Method of extending a printer lifetime of a printer according to claim 8 or claim 9, wherein if a marking element (12) of a printhead (10) for a specific colour is defective, printing with this marking element is replaced by printing with a corresponding

- 22 -

marking element (13) from another printhead (11) for that specific colour.

5 11. Method of preventing image artefacts when printing with a printer
according to claim 8 or claim 9, wherein if a marking element
(12) of a printhead (10) for a specific colour is defective,
printing with this marking element (12) is alternated with or
replaced by a dithering pattern formed by printing with a
corresponding marking element (13) on a second printhead (11) for
10 that specific colour.

12. Method of preventing image artefacts when printing with a printer
according to claim 8 or claim 9, wherein if a marking element
(12) of a printhead (10) for a specific colour is defective, a
15 dithering pattern is used including marking elements from the
printhead (10) and from another printhead (11) for that specific
colour, the position of the marking elements used corresponding
to or neighbouring the defective marking element (12).

20

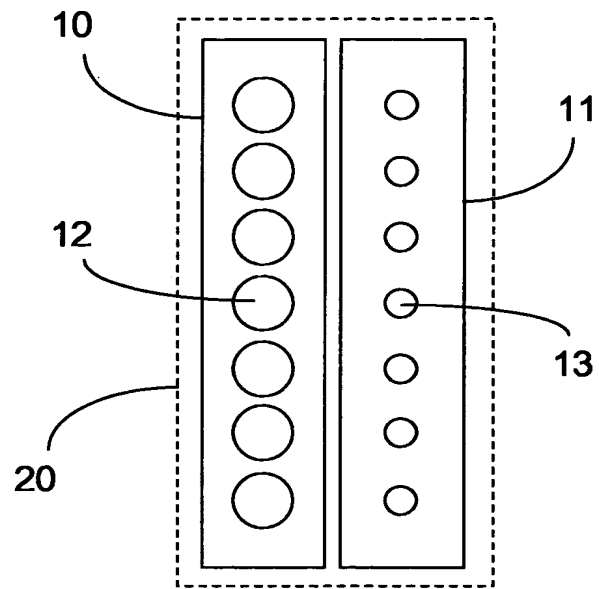


Fig. 1

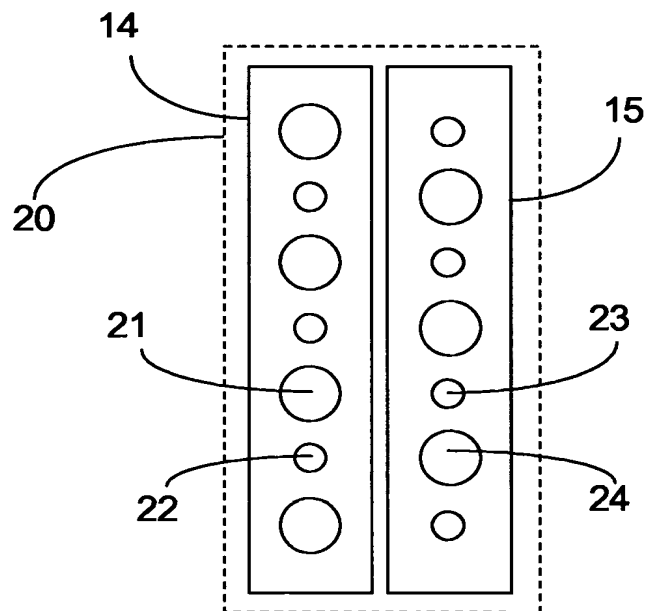
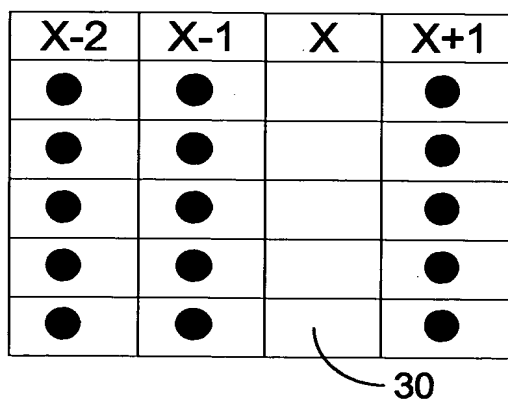
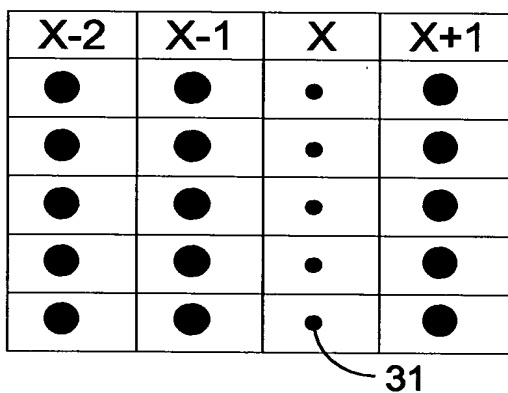
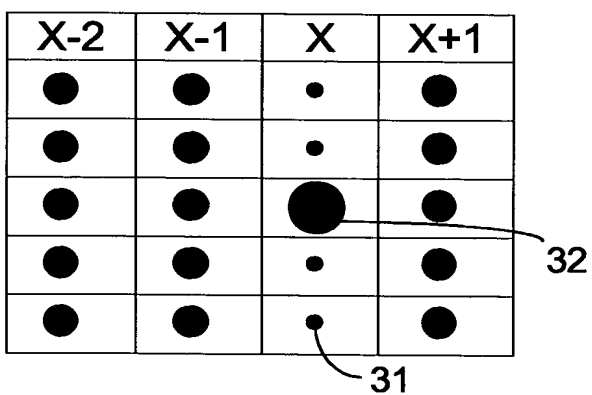


Fig. 2

**Fig. 3A****Fig. 3B****Fig. 3C**